YG GROUP
Stock code: 603681

SINCE
2002

YG GROUP

CLOTH DUCT TAPE
PRODUCT CATALOG



CATALOGUE

01

ABOUT YG & U.S. PLANT

COMPANY INTRODUCTION·····01

02

PRODUCT PROFILE

CLOTH DUCT TAPE NATURAL RUBBER·····04
CLOTH DUCT TAPE HOT MELT·····05
MATTE CLOTH DUCT TAPE·····06
PRINTED CLOTH DUCT TAPE·····07
GAFFER TAPE·····08
HEAVY DUTY CLOTH DUCT TAPE·····09
30-DAY UV RESISTANT BLUE CLOTH DUCT TAPE·····10
WARNING CLOTH DUCT TAPE·····11
LASER CLOTH DUCT TAPE·····12

YG Global Plants

YG Group, headquartered in Shanghai, a global leader in adhesive solutions with over 20 years of industry experience in automotive adhesive fields. YG Group operates five manufacturing bases: three in China (Shanghai, Jiangxi, and Shandong Provinces) and two overseas in Malaysia and Vietnam. Supported by three global operations centers—the U.S. Operations Center and the Mexico Operations Center —YG Group ensures agile production, efficient logistics, and localized services on a global scale.

Founded in Shanghai
In 2002

Main Board Listing
In 2019

Total Area
1 Million+

Serving Countries
110+

Employees
4000+

Serving Customers
26000+



Shandong Plant



Jiangxi Plant



Shanghai Plant

Vietnam Plant



Malaysia Plant



The United States Plant





Overiamination Rewind Slitter



2 Shafts Lathe Tape Slitter

YG Technology Inc.

ADD： 4009 Distribution Dr. Suite 225, Garland, TX 75041

Landscape
300,000 sq ft

Warehouse Storage Capacit
>300 Containers & Machines



CLOTH DUCT TAPE



CLOTH DUCT TAPE NATURAL RUBBER

Features:

- Easy to tear and apply
- High tensile strength
- Waterproof and oil-resistant
- Weather and temperature resistant



Applications:

Suitable for general applications, such as bundling, sealing, masking and temporary repairs across industries.

Product	DX2390	DX2513	DX2792
Size	1.9" × 60yds	1.9" × 60yds	1.9" × 60yds
Adhesive	Natural Rubber	Natural Rubber	Natural Rubber
Total Thickness	9.1 mil	9.8 mil	10.6 mil
Initial Tack	≥16 #	≥16 #	≥16 #
Peel Adhesion	≥36.0 oz/in	≥43.2 oz/in	≥43.2 oz/in
Tensile Strength	≥19.8 lb/in	≥25.4 lb/in	≥24.9 lb/in



CLOTH DUCT TAPE HOT MELT

Features:

- Durable on rough and oily surfaces
- Quick bonding and stable adhesion
- High temperature and abrasion resistance
- Environmentally friendly, no harmful emissions



Applications:

Suitable for sealing, fastening, and repairs in construction, logistics, automotive, electronics, medical, and general household or office applications.

Product	DA1330	DA1530	DA1730	DD1902
Size	1.9" × 50yds	1.9" × 50yds	1.9" × 50yds	1.9" × 50yds
Adhesive	Hot Melt	Hot Melt	Hot Melt	Hot Melt
Total Thickness	5.1 mil	5.9 mil	6.7 mil	7.5 mil
Initial Tack	≥16 #	≥18 #	≥18 #	≥21 #
Peel Adhesion	≥57.6 oz/in	≥57.6 oz/in	≥57.6 oz/in	≥66.5 oz/in
Tensile Strength	≥14.4 lb/in	≥14.8 lb/in	≥15.1 lb/in	≥24.7 lb/in



MATTE CLOTH DUCT TAPE

Features:

- Matte finish appearance
- No residue after removal
- Waterproof, oil and weather resistant
- High tensile strength, abrasion resistant



Applications:

Suitable for stage, exhibition, and event, machine setups where a matte, non-reflective finish is required.

Product	DP1703
Size	1.9" × 50yds
Adhesive	Hot Melt
Total Thickness	6.7 mil
Initial Tack	≥18 #
Peel Adhesion	≥50.4 oz/in
Tensile Strength	≥18.0 lb/in



PRINTED CLOTH DUCT TAPE

Features:



- Customizable appearance
- No residue after removal
- High tensile strength, abrasion resistant
- Waterproof, oil resistant and weather resistant

Applications:

Suitable for packaging, branding, and surface marking with customized graphics on cartons, floors, and various surfaces.

Product	DY1902
Size	1.9" × 20.2yds
Adhesive	Hot Melt
Total Thickness	7.5 mil
Initial Tack	≥17 #
Peel Adhesion	≥71.9 oz/in
Tensile Strength	≥16.2 lb/in



GAFFER TAPE

Features:

- Clean and professional appearance
- Light-blocking for enhanced visual setups
- Matte surface reduces light reflection
- Strong tensile strength with moderate peel adhesion



Applications:

Suitable for securing panels, lighting, and displays in studios, exhibitions, and stage environments requiring minimal light reflection and clean aesthetics.


Product	DB2860
Size	2.0" × 32.8yds
Adhesive	Hot Melt
Total Thickness	11.0 mil
Initial Tack	≥24 #
Peel Adhesion	≥25.2 oz/in
Tensile Strength	≥29.2 lb/in



HEAVY DUTY CLOTH DUCT TAPE

Features:

- Hand-tearable for easy application
- Moisture, UV, and temperature resistant
- Superior adhesion for strong, reliable bonding
- Reinforced backing for high strength and durability

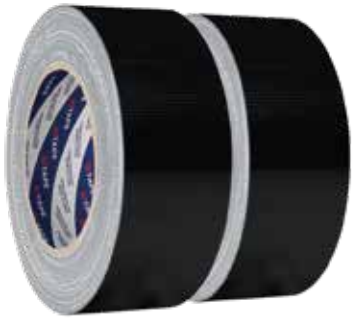

Applications:

Suitable for heavy-duty repairs, sealing, reinforcing, and general-purpose use where extra strength and long-lasting performance are required.

Product	DX4230
Size	1.9" × 35.0yds
Adhesive	Rubber
Total Thickness	16.5 mil
Initial Tack	≥20 #
Peel Adhesion	≥64.7 oz/in
Tensile Strength	≥23.6 lb/in



30-DAY UV RESISTANT BLUE CLOTH DUCT TAPE

Features:

- UV resistant for up to 30 days
- No residue after removal
- Easy to tear for convenient application
- Water, moisture, and all weather resistant



Applications:

Suitable for masking and protecting outdoor PVC, plastic, and metal door and window frames, and also for use in combination with PE plastic film.

Product	DS1710
Size	1.9" × 60.2yds
Adhesive	Solvent-Based
Total Thickness	6.3 mil
Initial Tack	≥14 #
Peel Adhesion	≥14.4 oz/in
Tensile Strength	≥12.4 lb/in



WARNING CLOTH DUCT TAPE

Features:

- Strong, long-lasting adhesion
- Easy removal with no residue
- High visibility colors for safety marking
- Waterproof and abrasion resistant for indoor & outdoor



Applications:

Suitable for safety marking, hazard identification, and temporary area demarcation on floors, walls, equipment, and construction sites, providing durable and reliable performance.

Product	DD2712
Size	2.0" × 32.8yds
Adhesive	Hot Melt
Total Thickness	10.6 mil
Initial Tack	≥23 #
Peel Adhesion	≥75.5 oz/in
Tensile Strength	≥16.9 lb/in



LASER CLOTH DUCT TAPE

Features:

- Easy to apply on flexible surfaces
- Eye-catching holographic colored finish
- Strong adhesion with long-lasting performance
- Wide applications for packing, wrapping, and fixing



Applications:

Suitable for decorative packaging, crafts, promotional displays, event setups, and surface customization.

Product	DP2104
Size	1.9" × 7.0yds
Adhesive	Hot Melt
Total Thickness	8.3 mil
Initial Tack	≥16 #
Peel Adhesion	≥71.9 oz/in
Tensile Strength	≥19.1 lb/in

YG GROUP

Stock code: 603681

SHANGHAI YONGGUAN ADHESIVE PRODUCTS CORP.,LTD.

ADD: NO.15 RD.KANGGONG, ZHUJIAJIAO INDUSTRIAL ZONE,QINGPU DISTRICT, SHANGHAI, CHINA

Tel : +86-21-59830069

Fax : +86-21-59832200

Post Code : 201713

E-mail : gmoffice1@ygtape.com

Web : www.ygtape.com