YG YG GROUP

Stock code: 603681

since

2002

SELF-ADHESIVE FLOOR PROTECTION FLEECE PRODUCT CATALOG



World-leading
Protective Film
Solution Provider

YG YG GROUP

Stock code: 603681

CONTACT US

TEL : +0086-21-59830069 **EMAIL :** gmoffice1@ygtape.com www.ygtape.com

www.ygtape.com



GROUP PROFILE

A world-leading adhesive products solution provider

The company, headquartered in Shanghai, has production bases in Jiangxi, Shandong, and Vietnam. We specialize in a wide range of industrial and civil adhesive materials and functional films.

Our business spans more than 110 countries and regions worldwide, maintaining stable partnerships with numerous renowned clients.

In recent years, as part of our strategic upgrade, we have been vigorously developing new energy adhesive materials in the industrial field.

Founded in Shanghai
in 2002

Main board listing
in 2019 (603681.SH)

Total area
860,000+ ㎡

Serving countries
110+

Employees
3000+

Serving customers
26000+

ISO9001 ISO14001 ISO45001 FSC REACH Global Recycled Standard OK biobased TÜV AUSTRIA FDA BSCI Business Social Compliance Initiative



Film Blowing Machine | Film Coating Machine | Pringting Machine | Cutting Machine | Testing Machine

▶ Complete industrial chain in the protection film prodcution:

Film Blowing Machine, Film Coating Machine, Pringting Machine, Cutting Machine, Testing Machine

▶ Annual Production of Various Adhesive Materials Exceeds 5.5 Billion Square Meters:

With ultra-strong scale integration production, we achieve superior product cost-effectiveness.

SELF-ADHESIVE FLOOR PROTECTION FLEECE (PAINTER FELT)

Compostion:

PE film + lamination + Fiber layer



Features:

- Excellent Scratch & Dent Protection
- Long-Lasting
- Noise reduction
- Wide Application
- Easy to install
- Leave no residue
- Printable



Available sizes:

Model: PFP series
120g 140g 160g 180g 200g 220g

Colors:

Application:

Provides safe and effective protection. Serves to cover floors of all types, carpets, tiles, furniture, etc.

SELF-ADHESIVE FLOOR PROTECTION FLEECE (PAINTER FELT)

Compostion:

PE film + lamination + Fiber layer



Features:

- Excellent Scratch & Dent Protection
- Long-Lasting
- Noise reduction
- Wide Application
- Easy to install
- Leave no residue
- Printable



Available sizes:

Model: PFP series
120g 140g 160g 180g 200g 220g

Colors:

Application:

Provides safe and effective protection. Serves to cover floors of all types, carpets, tiles, furniture, etc.

EMBOSSED SELF-ADHESIVE FLOOR PROTECTION FLEECE (PAINTER FELT)

Compostion:

PE film + lamination + Fiber layer



Features:

- Embossed surface, stronger anti-slip
- Wear resistance
- Easy to install
- Excellent Scratch
- Durable & long-lasting
- Wide Application
- Leave no residue
- Printable



Available sizes:

Model: PFPE series

160g 180g 200g 220g

Colors:


Application:

Provides safe and effective protection. Serves to cover floors of all types, carpets, tiles, furniture, etc.

GREY MATTE SELF-ADHESIVE FLOOR PROTECTION FLEECE (PAINTER FELT)

Compostion:

PE film + lamination + Fiber layer

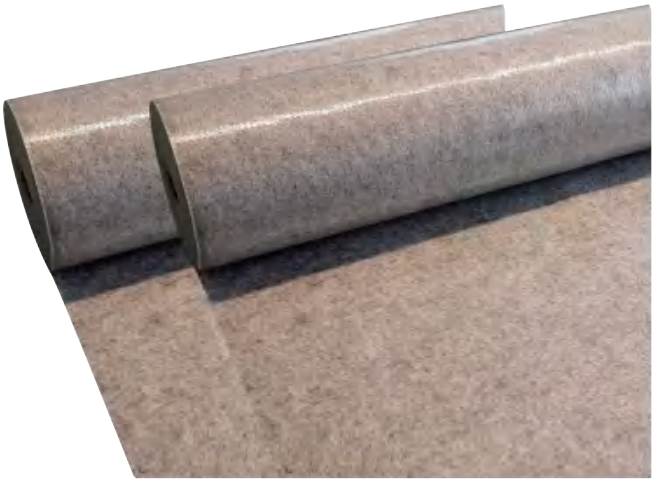

Features:

- Excellent Scratch & Dent Protection
- Long-Lasting
- Noise reduction
- Wide Application
- Easy to install
- Leave no residue
- Printable



Available sizes:

Model: PFPG series
140g 160g 180g 200g 220g

Colors:

Application:

Suitable for covering and protection of floors, carpet and furniture in drywall , scaffolding, renovation, relocation, painting and plastering work.

BREATHABLE SELF-ADHESIVE FLOOR PROTECTION FLEECE (PAINTER FELT)

Compostion:

Breathable PE film + lamination + Fiber layer



Features:

- Excellent Scratch & Dent Protection
- Long-Lasting
- Easy to install
- Moistureproof and damp-proof
- Prevents floor mold and discoloration

Available sizes:

Model: PFPB series
140g 160g 180g 200g 220g



Colors:

Application:

Suitable for covering and protection of floors, carpet and furniture in drywall , scaffolding, renovation, relocation, painting and plastering work.

HEAVY-DUTY SELF-ADHESIVE FLOOR PROTECTION FLEECE (PAINTER FELT)

Compostion:

OPP film + lamination + non-woven fabric



Features:

- Heavy-duty & high-density, extra durable
- Strong self-adhesive, not easy to fall off
- Excellent scratch & dent protection
- Noise reduction & floor protection
- Wear-resistant for heavy furniture
- Printable

Available sizes:

Model: PFPH series
200g 220g 240g 260g



Colors:

Application:

It has a thick fibre layer which provides excellent impact protection for a variety of kitchen and bathroom surfaces, while the PE backing will also prevent damage from dust, dirt and spills.

PE NON-SLIP COATING PAINTER FLEECE (PAINTER FELT)

Compostion:

PE film + lamination + Fiber layer



Features:

- Excellent Scratch & Dent Protection
- Long-Lasting
- Noise reduction
- Wide Application
- Easy to install
- Cost-effective



Available sizes:

Model: PFPF series
120g 140g 160g 180g 200g 220g


Application:

Protects floors, stairs, tiles, mattress pad, or protect the furniture from scratches, cuts, felt underlay below the wood floors, Pet nonwoven fabric, greenhouse/vegetable house insulating materials, the package materials of transportation.

FLOOR PROTECTION PAD

Compostion:

woven fabric (surface layer) +
EVA/PE foam (bottom layer)

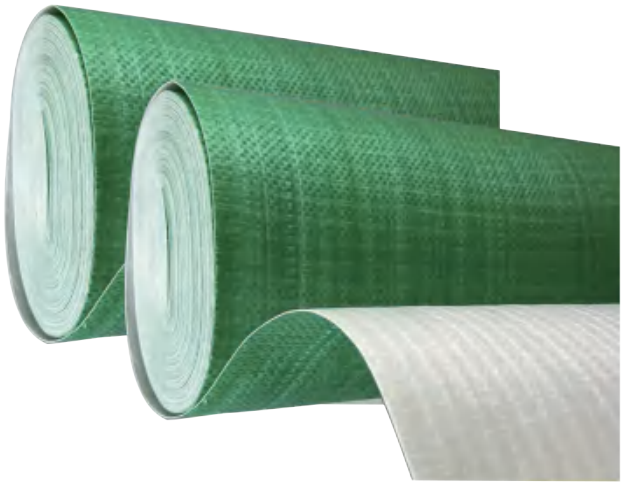

Features:

- Water-proof
- Weat-Resistance
- Easy sweep
- Environmentally friendly
- Anti-slip
- Safe and non-flammable
- Printable



Available sizes:

Model: PFPW series
1mm ~ 4mm

Application:

Its main function is to protect already laid tiles, marble, or wood flooring from scratches, impacts, or contamination by paint or dust during construction.

INSTALLING INSTRUCTIONS





Protects



Waterproof



Anti-skid



Breathable



Reusable

- Turn-off floor heating before laying
- Protect against direct solar radiation
- The areas to be covered must be dry underneath the breathable surface protective roll.
- The floor protective film cannot endure a permanent pressure of more than 100 kg/m2 for more than 24 hours
- Waiting period for laying:
  - Follow the manufacturer's guidelines for complete curing times. Due to variable site conditions, a site test should also be done to ensure foor is cured.
  - Wait at least 72 hours after the final coat has been applied before putting down the foor protective roll.
- Room temperature 10-25°C
- Allowable room humidity50%-60%
- The rolls should be laid down with an overlapping on each side by about 10cm (4 inches)

All the details included in this technical product information are based on our best knowledge and experiences. They do not represent a guarantee of certain properties. It is the responsibility of the user to determine the suitability for a particular purpose through his own tests and trials. Should the adherent underside remain on the floor, we disclaim liability.

Protects

- Hardwood floor
- Countertops
- LVT
- Stairs
- Tile
- Other surfaces



During Construction



Perfect Over Stairs



Heavy Traffic