YG GROUP
Stock code: 603681

SINCE
2002

YG GROUP

DOUBLE SIDED TAPE PRODUCT CATALOG



CATALOGUE

01

ABOUT YG

COMPANY INTRODUCTION····· 01

02

PRODUCT PROFILE

DOUBLE SIDED TISSUE TAPE·····04
DOUBLE SIDED FOAM MOUNTING TAPE·····05
RED LINER DOUBLE SIDED PET TAPE·····06
DOUBLE SIDED PVC TAPE····· 07
DOUBLE SIDED CLOTH TAPE HOT MELT····· 08
DOUBLE SIDED STRAPPING TAPE·····09
DOUBLE SIDED NANO TAPE····· 10
DOUBLE SIDED BLUE CARPET TAPE····· 11
DOUBLE SIDED PP TAPE····· 12
DOUBLE SIDED EXTENDED LINER TAPE····· 13

YG Global Plants

YG Group, headquartered in Shanghai, a global leader in adhesive solutions with over 20 years of industry experience in automotive adhesive fields. YG Group operates five manufacturing bases: three in China (Shanghai, Jiangxi, and Shandong Provinces) and two overseas in Malaysia and Vietnam. Supported by two global operations centers—the U.S. Operations Center and the Mexico Operations Center —YG Group ensures agile production, efficient logistics, and localized services on a global scale.

Founded in Shanghai
In 2002


Main Board Listing
In 2019

Total Area
1 Million+

Serving Countries
110+

Employees
4000+

Serving Customers
26000+

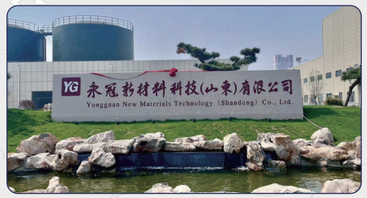

Shandong Plant



Shanghai Plant



Jiangxi Plant

Vietnam Plant




Malaysia Plant




The United States Plant



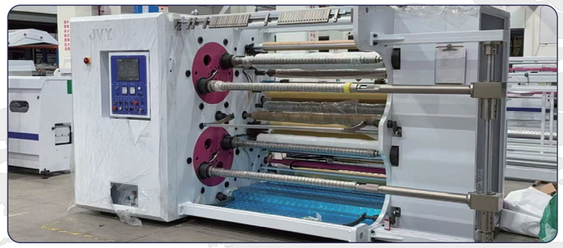

Overiamination Rewind Slitter

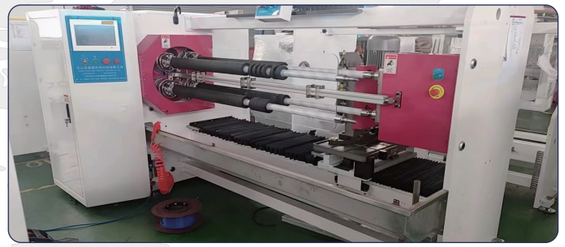


2 Shafts Lathe Tape Slitter

YG Technology Inc.

ADD： 4009 Distribution Dr. Suite 225, Garland, TX 75041

Landscape
300,000 sq ft

Warehouse Storage Capacit
>300 Containers & Machines

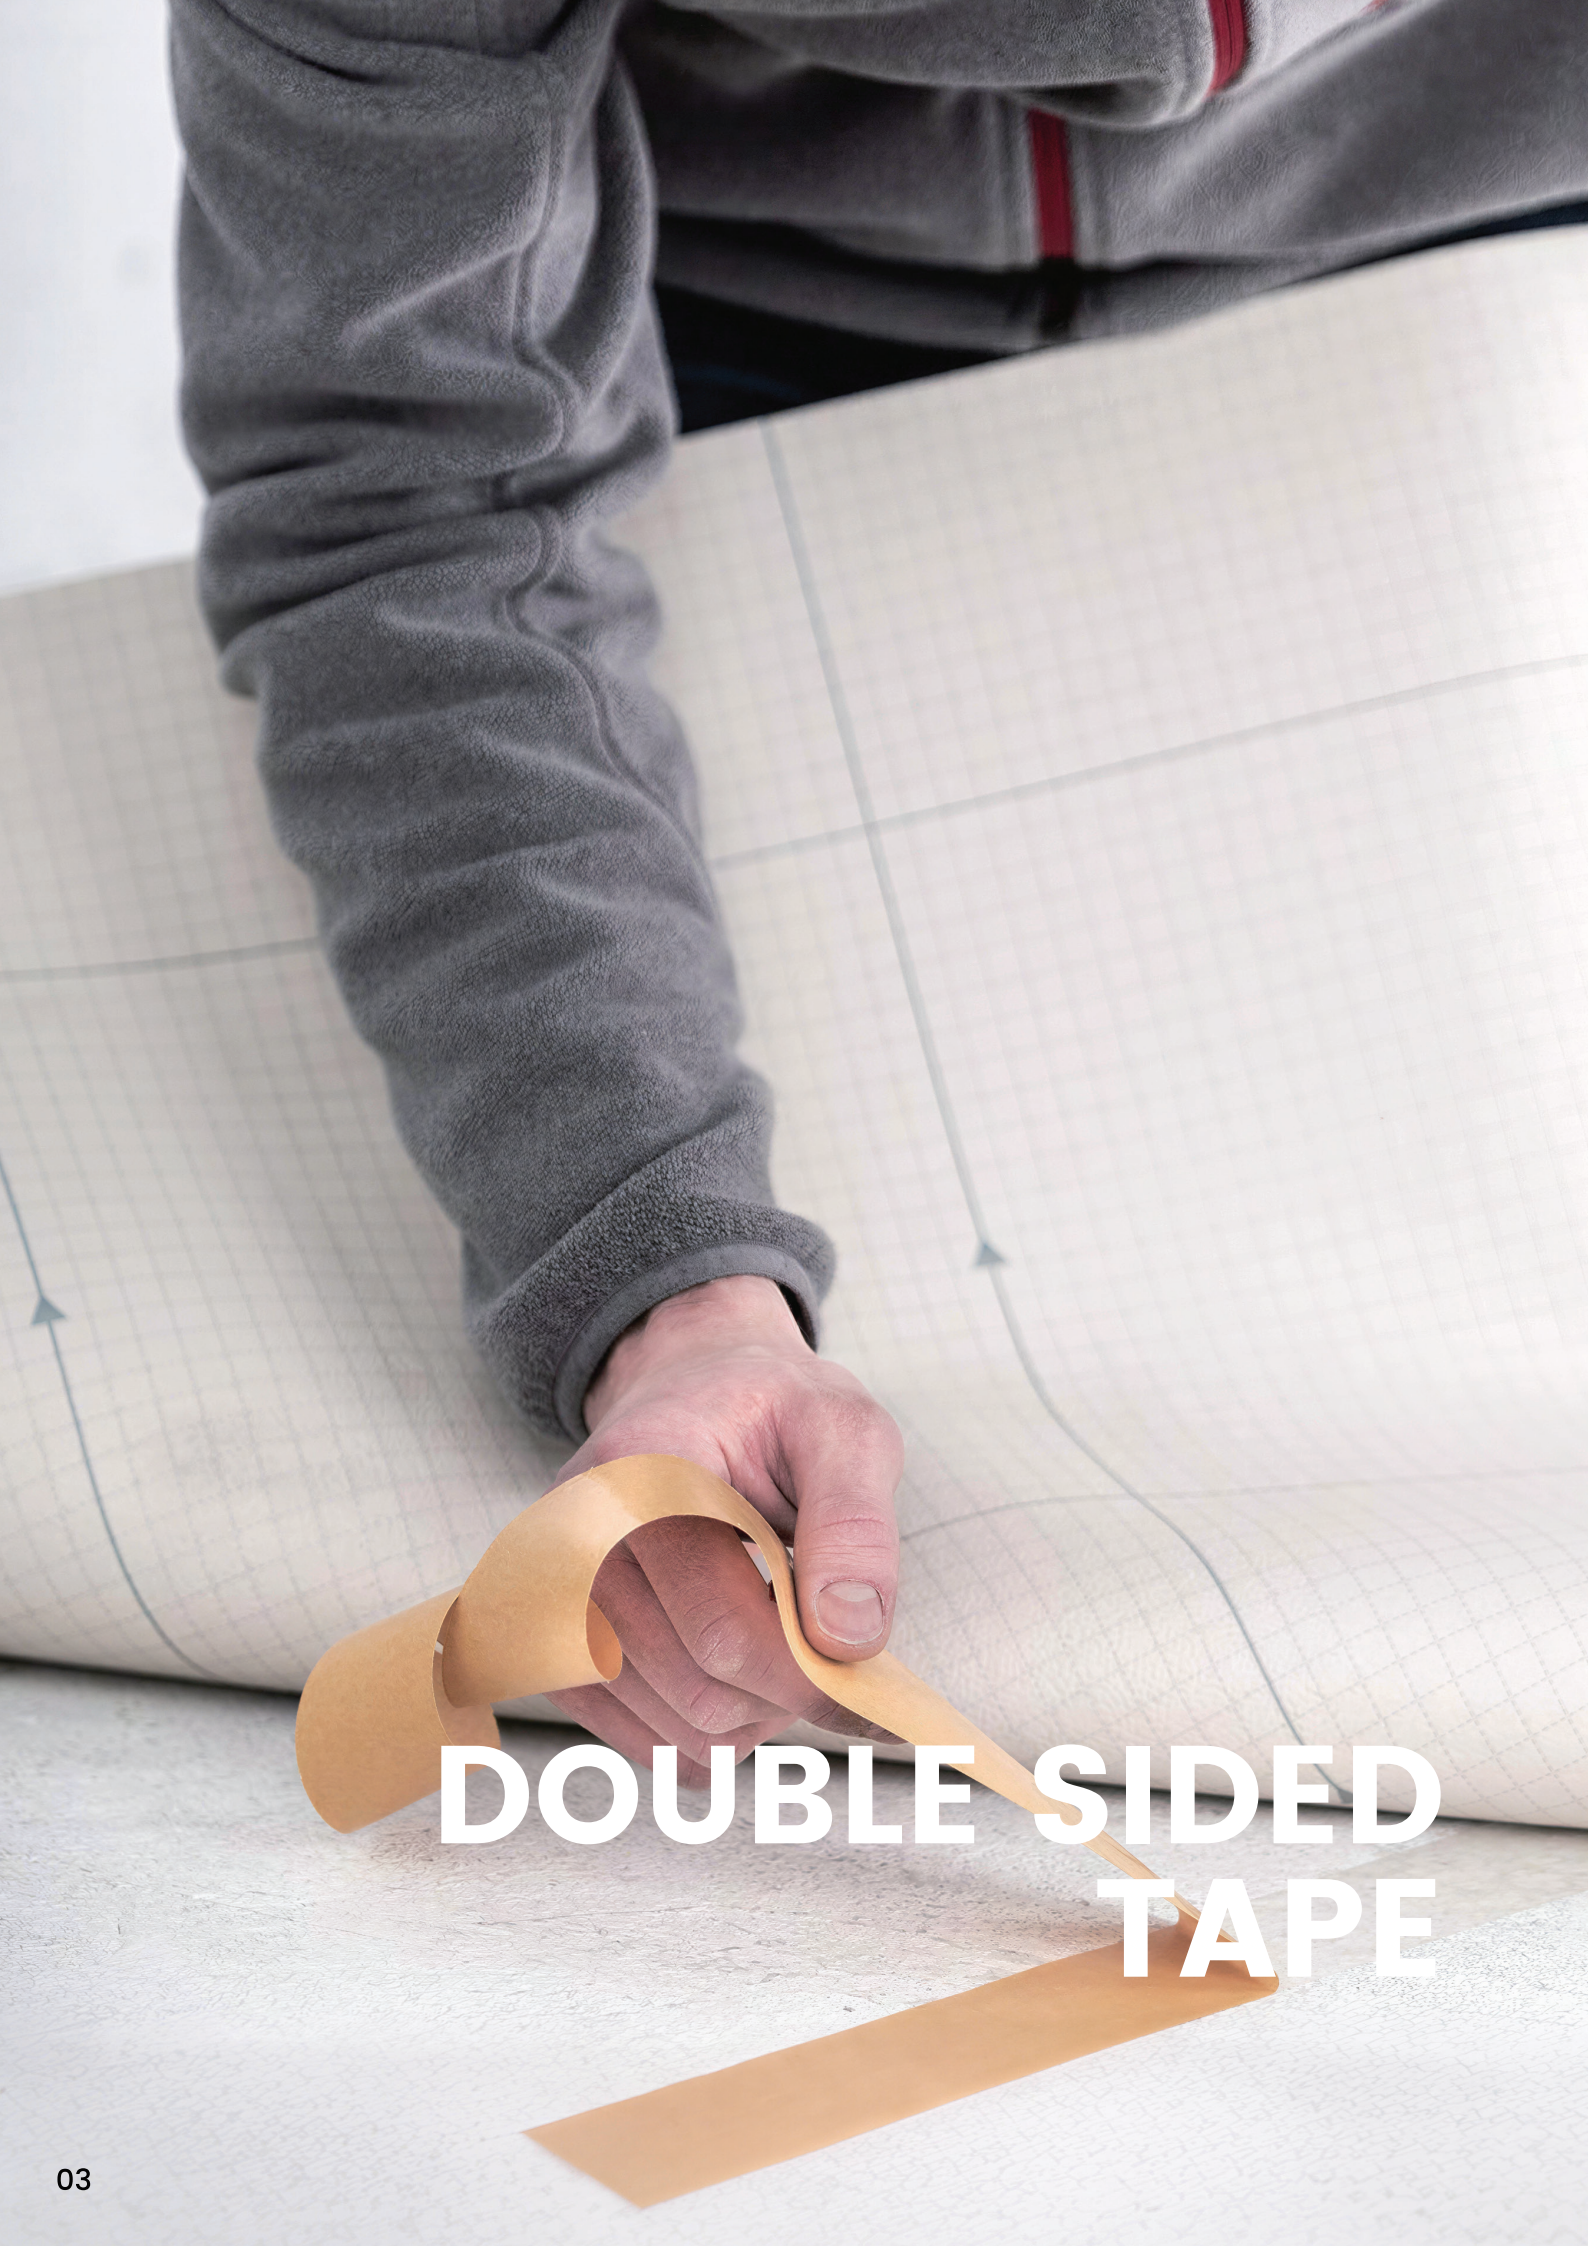

DOUBLE SIDED TAPE



DOUBLE SIDED TISSUE TAPE

Features:

- High tack and strong adhesion
- Heat and aging resistant
- Flexible and easy tear
- Clean and efficient bonding



Applications:

Suitable for DIY projects, home decoration, carpet installation, and general bonding tasks in home improvement and interior applications.


Product	SE0912	SE1011	SM09101	SM10102	SM12101
Size	0.5/1.0" × 60 yds 1.0/1.9" × 55 yds	0.5/1.0" × 60 yds 1.0/1.9" × 55 yds	0.5/1.0" × 60 yds 1.0/1.9" × 55 yds	0.5/1.0" × 60 yds 1.0/1.9" × 55 yds	0.5/1.0" × 60 yds 1.0/1.9" × 55 yds
Backing	Tissuet	Tissue	Tissue	Tissue	Tissue
Adhesive	Hot Melt	Hot Melt	Solvent-Based	Solvent-Based	Solvent-Based
Total Thickness	3.5 mil	3.9 mil	3.5 mil	3.9 mil	4.7 mil
Initial Tack	≥8 #	≥9 #	≥8 #	≥8 #	≥8 #
Peel Adhesion	≥46.8 oz/in	≥50.4 oz/in	≥36.0 oz/in	≥43.2 oz/in	≥46.8 oz/in



DOUBLE SIDED FOAM MOUNTING TAPE

Features:


- High initial tack and strong bonding
- Excellent temperature and aging resistant
- Cushions and absorbs vibration
- Conforms to uneven surfaces

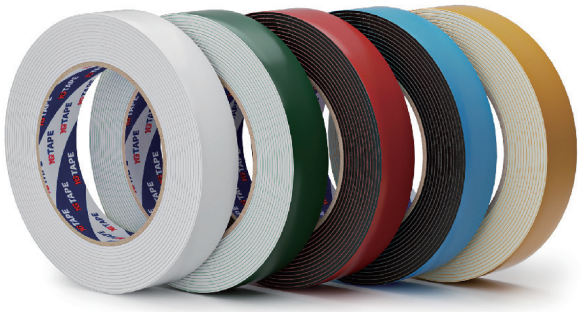

Applications:

Suitable for decorative and automotive applications, providing secure adhesion for trims, panels, and other components requiring long-lasting hold.

Product	SF1010	SF1020	SF1510	SF2020
Size	0.5/0.8/1.0" × 16 yds	0.5/0.8/1.0" × 16 yds	0.5/0.8/1.0" × 16 yds	0.5/0.8/1.0" × 16 yds
Backing	Foam(IXPE)	Foam(EVA)	Foam(IXPE)	Foam(EVA)
Adhesive	Solvent-Based	Solvent-Based	Solvent-Based	Solvent-Based
Total Thickness	39.4 mil	39.4 mil	59.1 mil	78.8 mil
Initial Tack	≥12 #	≥12 #	≥12 #	≥10 #
Peel Adhesion	≥28.8 oz/in	≥28.8 oz/in	≥28.8 oz/in	≥28.8 oz/in

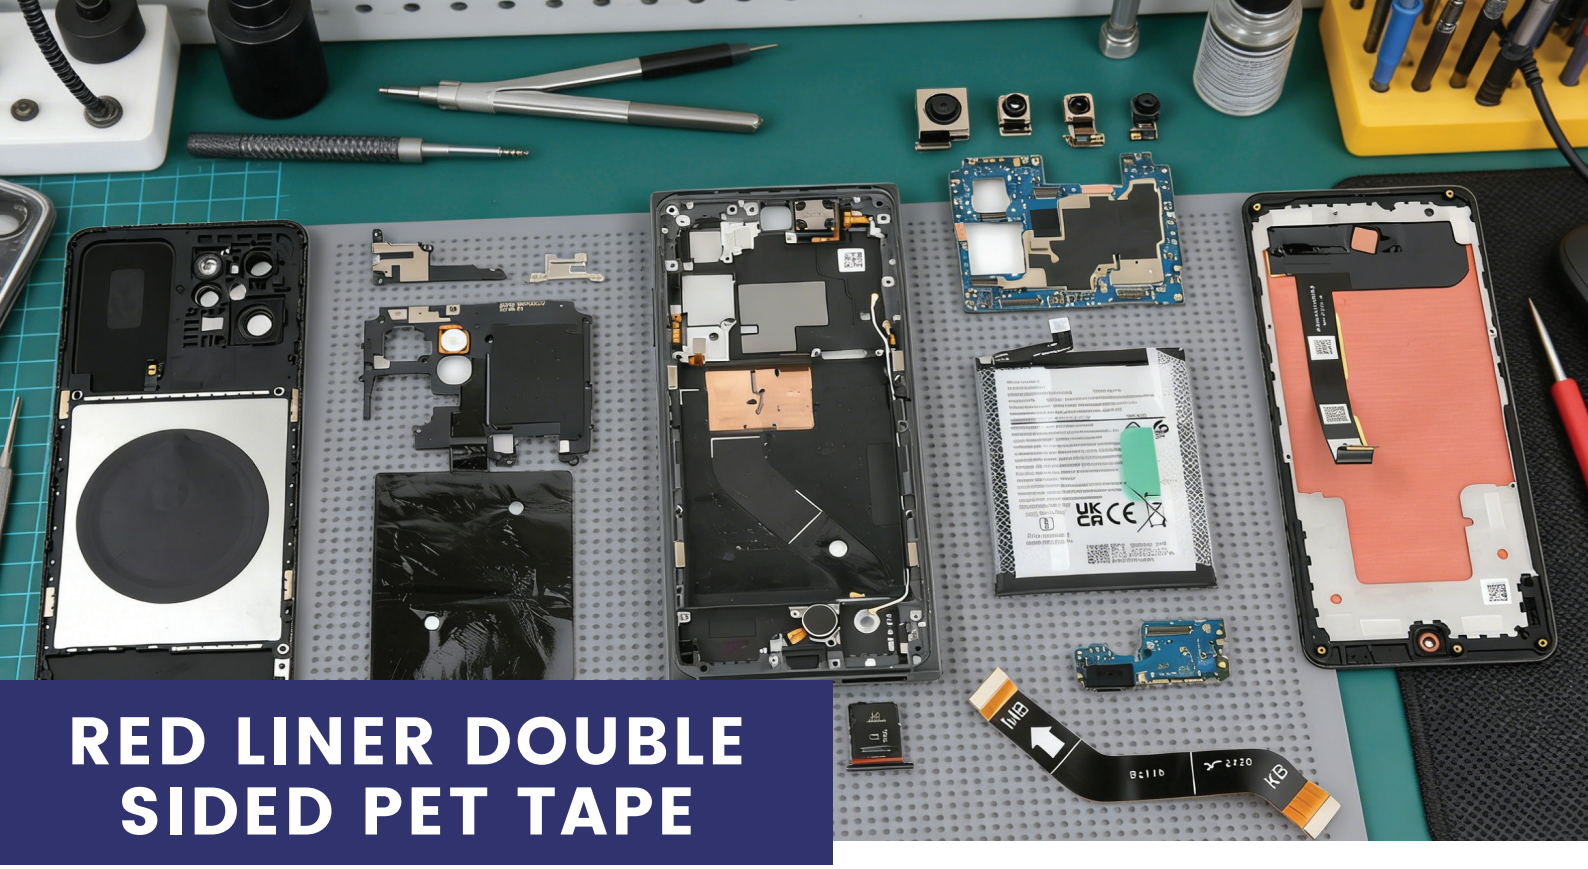

RED LINER DOUBLE SIDED PET TAPE

Features:

- High-temperature and aging resistant
- Strong and stable adhesion
- Thin profile with clean appearance
- Red MOPP liner for easy handling and identification



Applications:

Suitable for bonding electronic components and assembling furniture parts, providing reliable adhesion in demanding industrial and manufacturing environments.

Product	ST1019	ST1612	ST2012
Size	0.5/0.8/1.0" × 16 yds	0.5/0.8/1.0" × 16 yds	0.5/0.8/1.0" × 16 yds
Backing	PET	PET	PET
Adhesive	Solvent-Based	Solvent-Based	Solvent-Based
Total Thickness	4.1 mil	6.5 mil	8.1 mil
Initial Tack	≥5 #	≥5 #	≥4 #
Peel Adhesion	≥36.0 oz/in	≥43.2 oz/in	≥42.3 oz/in



DOUBLE SIDED PVC TAPE

Features:

- Instant adhesion
- Durable and long-lasting
- Excellent adhesion performance
- Suitable for smooth and textured surfaces



Applications:

Suitable for home decoration, DIY projects, wall mounting, jointing, and carpet installation applications.

Product	SV2201	SV2401
Size	1" x 55 yds	1" x 55 yds
Backing	PVC	PVC
Adhesive	Solvent-Based	Solvent-Based
Total Thickness	8.7 mil	9.5 mil
Initial Tack	≥10 #	≥18 #
Peel Adhesion	≥64.7 oz/in	≥82.7 oz/in



DOUBLE SIDED CLOTH TAPE

Features:

- High initial tack and strong holding strength
- Tearable for easy application
- Performs well on rough and smooth surfaces
- Good flexibility and conformability



Applications:

Suitable for carpet installation, fabric securing, and mounting decorative items on walls or various surfaces.

Product	SD1701	SD2201	SD2801
Size	1.4" × 13 yds, 1.4" × 14 yds 1.9" × 25 yds, 2.0" × 12 yds	1.4" × 13 yds, 1.4" × 14 yds 1.9" × 25 yds, 2.0" × 12 yds	1.4" × 13 yds, 1.4" × 14 yds 1.9" × 25 yds, 2.0" × 12 yds
Backing	Cloth	Cloth	Cloth
Adhesive	Hot Melt	Hot Melt	Hot Melt
Total Thickness	6.7 mil	8.7 mil	11.0 mil
Initial Tack	≥15 #	≥18 #	≥20 #
Peel Adhesion	≥43.2 oz/in	≥46.8 oz/in	≥61.2 oz/in



DOUBLE SIDED STRAPPING TAPE

Features:

- Strong adhesion
- High tear resistant
- High tensile strength
- High temperature resistant



Applications:

Suitable for reliable positioning and fixation in electronics, automotive trim, footwear, papermaking, and craft applications.

Product	SB1602
Size	1.4" × 14 yds, 1.9" × 25 yds
Backing	Fiberglass
Adhesive	Hot Melt
Total Thickness	6.3 mil
Tensile Strength	≥101.1 lb/in
Peel Adhesion	≥64.7 oz/in



DOUBLE SIDED NANO TAPE

Features:

- Strong adhesion
- Excellent holding power
- Good temperature resistance
- No residue after removal



Applications:

Suitable for object fixation and hanging, offering secure adhesion on various surfaces for both home and industrial use.

Product	SWEA00-9	SWEB00-9
Size	0.8/1.2" × 1/3 yds	0.8/1.2" × 1/3 yds
Backing	(No Backing)	(No Backing)
Adhesive	UV	UV
Total Thickness	39.4 mil	78.7 mil
Holding Power	≥24 h	≥24 h
Peel Adhesion	≥79.1 oz/in(20min)	≥107.9 oz/in(20min)



DOUBLE SIDED BLUE CARPET TAPE

Features:

- Moderate adhesion
- Good initial tack
- Hand-tearable for easy application
- No residue after removal



Applications:

Suitable for temporary mounting, splicing, carpet hold-down, engraving, and any use requiring temporary surface bonding.

Product	SA2601
Size	1.9" × 55 yds
Backing	Cloth
Adhesive	Natural Rubber
Total Thickness	12.6 mil
Initial Tack	≥25 #
Peel Adhesion	≥50.4 oz/in



DOUBLE SIDED PP TAPE

Features:

- Strong adhesion
- Excellent tensile strength
- Excellent toughness
- Durable, long-lasting performance



Applications:

Suitable for use on leather, nameplates, stationery, electronics, automotive trims, footwear, paper products, and craft positioning.

Product	SP0901	SP1090
Size	0.5" × 20 yds, 1.0/1.5/2.0" × 27 yds 1.5" × 14 yds, 1.9" × 25 yds,	0.5" × 20 yds, 1.0/1.5/2.0" × 27 yds 1.5" × 14 yds, 1.9" × 25 yds,
Backing	PP	PP
Adhesive	Hot Melt	Hot Melt
Total Thickness	3.7 mil	3.9 mil
Tensile Strength	≥19.1 lb/in	≥20.0 lb/in
Peel Adhesion	≥54.0 oz/in	≥64.7 oz/in



DOUBLE SIDED EXTENDED LINER TAPE

Features:

- Strong adhesion
- Tack-free tape roll edges
- Easy liner starting and removal
- High elongation and excellent conformability



Applications:

Suitable for secure closure of shipping boxes, tubes, and envelopes, as well as mounting promotional materials.

Product	SMPE18
Size	0.5" x 360 yds, 0.75/1/2 × 640 yds
Backing	PE
Adhesive	Hot Melt
Total Thickness	6.9 mil
Initial Tack	≥18 #
Holding Power	≥5 h

YG GROUP

Stock code: 603681

SHANGHAI YONGGUAN ADHESIVE PRODUCTS CORP.,LTD.

ADD: NO.15 RD.KANGGONG, ZHUJIAJIAO INDUSTRIAL ZONE,QINGPU DISTRICT, SHANGHAI, CHINA

Tel : +86-21-59830069

Fax : +86-21-59832200

Post Code : 201713

E-mail : gmoffice1@ygtape.com

Web : www.ygtape.com