YG GROUP
Stock code: 603681

SINCE
2002

# YG GROUP

## BOPP PACKING TAPE
## PRODUCT CATALOG



CATALOGUE

# 01

## ABOUT YG


COMPANY INTRODUCTION····· 01


# 02

## PRODUCT PROFILE


WATER-BASED BOPP PACKING TAPE····· 04

HOT MELT BOPP PACKING TAPE····· 05

SOLVENT-BASED BOPP PACKING TAPE····· 06

NATURAL RUBBER BOPP PACKING TAPE····· 07

COLORED BOPP PACKING TAPE····· 08

PRINTED BOPP PACKING TAPE····· 09

PRINTABLE BOPP PACKING TAPE····· 10

HIGH TACK BOPP PACKING TAPE····· 11

LOW NOISE BOPP PACKING TAPE····· 12

NO BUBBLE BOPP PACKING TAPE····· 13

MACHINE ROLL BOPP PACKING TAPE····· 14

SHEATHING TAPE····· 15

# YG Global Plants

YG Group, headquartered in Shanghai, a global leader in adhesive solutions with over 20 years of industry experience in automotive adhesive fields. YG Group operates five manufacturing bases: three in China (Shanghai, Jiangxi, and Shandong Provinces) and two overseas in Malaysia and Vietnam. Supported by two global operations centers—the U.S. Operations Center and the Mexico Operations Center —YG Group ensures agile production, efficient logistics, and localized services on a global scale.

Founded in Shanghai
In 2002

Main Board Listing
In 2019

Total Area
1 Million+


Serving Countries
110+

Employees
4000+

Serving Customers
26000+



Jiangxi Plant

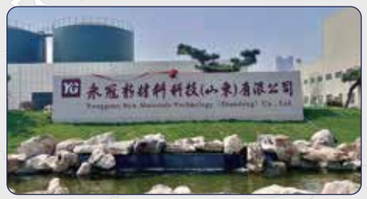

Shandong Plant



Shanghai Plant

Vietnam Plant



Malaysia Plant



# The United States Plant






Overiamination Rewind Slitter



2 Shafts Lathe Tape Slitter

## YG Technology Inc.

ADD： 4009 Distribution Dr. Suite 225, Garland, TX 75041

Landscape
**300,000** sq ft

Warehouse Storage Capacit
**>300** Containers & Machines



# BOPP TAPE



# WATER-BASED BOPP PACKING TAPE

## Features:

- Environmentally friendly
- Available in multiple colors
- Strong and reliable adhesion
- Balanced performance, cost-effective



## Applications:

Suitable for packaging, sealing, fixing, bundling, and general office use.

| Product | BP4010 | BP4510 | BP5010 | BP6310 |
|---|---|---|---|---|
| Size | 2/3in × 110yds | 2/3in × 110yds | 2in × 110/1500yds<br>3in × 55/110/1000yds | 2/3in × 110yds |
| Adhesive | Water-Based | Water-Based | Water-Based | Water-Based |
| Total Thickness | 1.6mil | 1.8mil | 2.0mil | 2.5mil |
| Peel Adhesion | ≥16.55oz/in | ≥17.99oz/in | ≥19.79oz/in | ≥21.59oz/in |
| Tensile Strength | ≥17.08lb/in | ≥17.53lb/in | ≥19.10lb/in | ≥24.27lb/in |



# HOT MELT BOPP PACKING TAPE

## Features:

- Environmentally friendly
- Strong tensile strength
- Instant and long-lasting adhesion
- Meets FDA requirements for indirect food contact



## Applications:

Suitable for food packaging and sealing recycled cartons, as well as industrial and household applications, providing an efficient and eco-friendly sealing solution.

| Product | BP3850 | BP4050 | BP4550 | BP4850 | BP5050 | BP6550 | BP7650 |
|---|---|---|---|---|---|---|---|
| Size | 2in × 55/110yds<br>3in × 55/110yds | 2in × 55yds<br>3in × 110yds | 2in × 110yds<br>3in × 110yds | 2in × 55/110/<br>1000/1500yds<br>3in × 110yds | 2in × 110yds | 2in x 110 yds<br>3in x 110 yds | 2in x 55yds |
| Adhesive | Hot Melt | Hot Melt | Hot Melt | Hot Melt | Hot Melt | Hot Melt | Hot Melt |
| Total Thickness | 1.5mil | 1.6mil | 1.8mil | 1.9mil | 2.0mil | 2.6mil | 3.0mil |
| Peel Adhesion | ≥32.39oz/in | ≥32.39oz/in | ≥34.19oz/in | ≥34.19oz/in | ≥34.19oz/in | ≥28.79oz/in | ≥28.79oz/in |
| Tensile Strength | ≥16.85lb/in | ≥16.85lb/in | ≥18.43lb/in | ≥19.55lb/in | ≥19.55lb/in | ≥24.72lb/in | ≥30.34lb/in |




# SOLVENT-BASED BOPP PACKING TAPE

## Features:

- Strong adhesion
- High tensile strength
- Reliable yellowing resistance
- High temperature and weather resistance




## Applications:

Suitable for general packaging, carton sealing, securing and bundling items, as well as for simple repairs and quick fixes without tools.

| Product | BP5090 | BP7690 |
|---|---|---|
| Size | 2in x 110/1000yds<br>3in x 110/1000yds | 2in x 55/110yds<br>3in x 110yds |
| Adhesive | Solvent-Based | Solvent-Based |
| Total Thickness | 2.0mil | 3.0mil |
| Peel Adhesion | ≥26.99oz/in | ≥21.59oz/in |
| Tensile Strength | ≥17.98lb/in | ≥26.97lb/in |



# NATURAL RUBBER BOPP PACKING TAPE

## Features:

- High tensile strength
- Humidity resistance
- Strong, long-lasting adhesion
- Reliable low-temperature performance




## Applications:

Suitable for cold-chain products packaging and carton sealing, offering reliable protection during transit and secure closure for temperature-sensitive items.

| Product | BQ4570 | BP5070 | BP5670 |
|---|---|---|---|
| Size | 2in x 55/110yds | 2/3in x 110yds | 2/3in x 110yds |
| Adhesive | Natural Rubber | Natural Rubber | Natural Rubber |
| Total Thickness | 1.8mil | 2.0mil | 2.3mil |
| Peel Adhesion | ≥26.99oz/in | ≥28.79oz/in | ≥30.59oz/in |
| Tensile Strength | ≥15.96lb/in | ≥15.96lb/in | ≥17.98lb/in |



# COLORED BOPP PACKING TAPE

## Features:

- Strong water-based adhesive
- Vibrant color options
- Good conformability
- Easy to unwind and apply



## Applications:

Suitable for general packaging, carton sealing, bundling, and color-coded labeling for industrial, office, or household use.

| | |
|---|---|
| Product | BY5012 |
| Size | 2in x 110/1000yds<br>3in x 1000yds |
| Adhesive | Water-Based |
| Total Thickness | 2.0mil |
| Peel Adhesion | ≥19.79oz/in |
| Tensile Strength | ≥19.10lb/in |
| Custom Colors | Blue \ Green \ Orange \ Red \ White \ Yellow |




# PRINTED BOPP PACKING TAPE

## Features:

- Durable and abrasion-resistant
- Flexible for short-run production
- Supports small-batch customization
- Customizable with logos, text and patterns




## Applications:

Suitable for branding, promotional packaging, customized labeling projects.

| | |
|---|---|
| Product | BY7691 |
| Size | 2in x 55yds |
| Adhesive | Solvent-Based |
| Total Thickness | 3.0mil |
| Peel Adhesion | ≥21.59oz/in |
| Tensile Strength | ≥26.97lb/in |



# PRINTABLE BOPP PACKING TAPE

## Features:



- Enhances brand recognition
- Clear and professional appearance
- Strong adhesion and high resilience
- Customizable with logos, text and patterns

## Applications:

Suitable for branded packaging, labeling, and enhancing the presentation of shipping or retail boxes.

| | |
|---|---|
| Product | BH5030 |
| Size | 5.7in × 1000yds |
| Adhesive | Water-Based |
| Total Thickness | 2.0mil |
| Peel Adhesion | ≥17.99oz/in |
| Tensile Strength | ≥19.10lb/in |




# HIGH TACK BOPP PACKING TAPE

## Features:

- High tack
- Durable, long-lasting adhesion
- Smooth unwinding
- Suitable for various surfaces



## Applications:

Suitable for packaging, carton sealing, bundling, and general-purpose industrial or household applications requiring strong tack.

| Product | BP4315 | BP4519 | BP5016 | BP5312 | BP6511 |
|---|---|---|---|---|---|
| Size | 2/3in × 110yds | 2/3in × 110yds | 2in × 110/1000/1500yds<br>3in × 1000yds | 2in × 110/1000yds<br>3in × 110/1000yds | 2in × 110/1000yds<br>3in × 110/1000yds |
| Adhesive | Water-Based | Water-Based | Water-Based | Water-Based | Water-Based |
| Total Thickness | 1.7mil | 1.8mil | 2.0mil | 2.1mil | 2.6mil |
| Peel Adhesion | ≥14.39oz/in | ≥17.99oz/in | ≥19.79oz/in | ≥18.71oz/in | ≥21.59oz/in |
| Tensile Strength | ≥17.08lb/in | ≥17.53lb/in | ≥19.10lb/in | ≥19.10lb/in | ≥24.72lb/in |



# LOW NOISE BOPP PACKING TAPE

## Features:

- Strong adhesion
- High tensile strength
- Low unwinding noise
- Suitable for noise-sensitive environments



## Applications:

Suitable for packaging in quiet environments such as offices, schools, and homes.

| | |
|---|---|
| Product | BD4510 |
| Size | 2in × 110yds, 3in × 55/110yds |
| Adhesive | Water-Based |
| Total Thickness | 1.8mil |
| Peel Adhesion | ≥17.99oz/in |
| Tensile Strength | ≥17.53lb/in |



# MACHINE ROLL BOPP PACKING TAPE

## Features:

- Strong adhesion and tensile strength
- Compatible with automatic machines
- Long roll format for high efficiency
- Suitable for high-volume use



## Applications:

Suitable for industrial applications, particularly in automated or assembly-line packaging and carton-sealing environments.

| Product | BP4552 | BP4510 | BP6510 |
|---|---|---|---|
| Size | 2in × 1000/1500/2000yds<br>3in × 1000yds | 2in × 1000/1500/2000yds<br>3in × 1000yds | 2in × 1000/1500/2000yds<br>3in × 1000yds |
| Adhesive | Hot Melt | Water-Based | Water-Based |
| Total Thickness | 1.8mil | 1.8 mil | 2.6mil |
| Peel Adhesion | ≥26.99oz/in | ≥17.99oz/in | ≥21.59oz/in |
| Tensile Strength | ≥16.40lb/in | ≥17.53lb/in | ≥24.72lb/in |



# SHEATHING TAPE

## Features:

- Strong adhesion
- Reliable for sub-zero temperatures
- Stick well on irregular surfaces
- Available for custom printing



## Applications:

Suitable for sealing and joining seams, repairing house wrap or sheathing materials, and general fixing tasks.

| | |
|---|---|
| Product | BYD080-LS1 |
| Size | 2/3in x 55yds |
| Adhesive | Solvent-Based |
| Total Thickness | 3mil |
| Peel Adhesion | ≥32.9oz/in |
| Tensile Strength | ≥28.5lb/in |

YG GROUP

Stock code: 603681

**SHANGHAI YONGGUAN ADHESIVE PRODUCTS CORP.,LTD.**

ADD: NO.15 RD.KANGGONG, ZHUJIAJIAO INDUSTRIAL ZONE,QINGPU DISTRICT, SHANGHAI, CHINA

Tel : +86-21-59830069

Fax : +86-21-59832200

Post Code : 201713

E-mail : gmoffice1@ygtape.com

Web : www.ygtape.com